



INTELLIGENT FACILITY SOLUTIONS

Electric Works, 3 Concourse Way, Sheffield, S1 2BJ

United Kingdom: +44 (0) 114 354 0047

Eire: +353 190 36387

sales@ihdryers.co.uk

www.intelligenthanddryers.com

Cleanflow Automatic 1.6L Countertop Liquid Soap and Alcohol GEL Dispenser

COUNTERTOP-MOUNTED

Automatic



IFSDJ0252AC
Polished Chrome



General Description

- Automatic countertop-mounted soap dispenser, 1.6 l capacity, manufactured in chromed brass, bright finish.
- Available in bright finish, this automatic countertop-mounted soap dispenser has a functional, robust and trendy design that matches the new range of bathroom accessories. This allows this soap dispenser to blend into any space perfectly.
- Suitable for high traffic facilities and for public use.
- Dispenses liquid soaps with neutral pH, chlorine free and density between 2,000 and 3,500 cP. Surgical soaps and soaps with solid abrasive particles are not supported.


Components & materials

- **IFSDJ0252AC:** chromed brass, bright finish.
- **SPOUT ASSEMBLY:** chromed brass, bright finish, 131x74x85 mm.
- **SOAP TANK:** refillable tank, 1,600 ml capacity and made in Polyethylene (PE).
- **POWE INPUT:** dc 6v, dX4Alkaline battery. Stand-by current less than 100 μ A and active current less than 1 A.
- **LED INDICATOR:** red LED ON when sensing an object. Red LED constantly ON means low battery light. Blue LED flashes when soap level is low.
- **INFRARED SENSOR:** self-adjustable sensing distance from 90 to 130 mm. It requires between 0.5 to 1 second to carry out the dispensing operation.
- **SUITABLE SOAPS:** chlorine free liquid soaps with a viscosity between 2,000 and 3,500 mPa.s and a pH as close to 7.0 (pH neutral). Surgical soaps and soaps with solid abrasive particles are not supported.

Technical Specifications


Dimensions	131x74x85 mm
Capacity	1.600 ml
Net weight	950 g
Quantity dispensed per pump	0,8- 2,2 ml
Power	DC 6V
Battery Type	4 x D 1.5V Alkaline
Battery lifetime Operating	50.000 cycles
temperatures Operating	4-50 °C
humidity	20-90%
IP degree	IP43

Dimensions

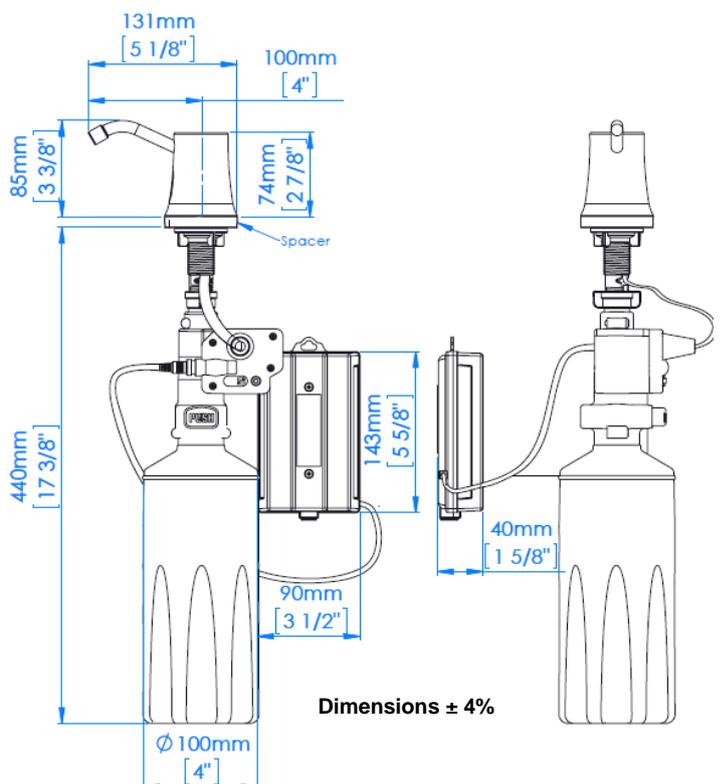

OPERATION

Place your hand under the spout. Soap will be dispensed automatically within 1 second. Keep the hand in this position until the end of the soap dosage



MOUNTING TEMPLATE

Dispenser can be located on the left or right of the sink

