

Dryflow Classic PLUS Mk2

Recommended traffic:

>500 uses a day

riba
product
selector

n55Plus

Provides low noise yet fast drying

- An attractive and elegantly designed cover, available in a Die-cast aluminium polished chrome or white finish.
- One of the fastest drying, energy efficient hand dryers in our quiet range, bringing a great balance between low noise and low energy with dry times under 20 seconds.
- Suitable for high traffic office buildings with a motor life that exceeds most others.
- Noise levels remains low at just 72dB, even when the hands are placed in the airflow - benefits include limited noise transfer into work areas and conference rooms.
- Three times more energy efficient than a conventional hand dryer.
- A steel back plate and anti-tamper screws provide added security and make this a very robust hand dryer.

Approx. cost per 1000 dries:

 84p

Guarantee period:

 5 Years



Dryflow Classic PLUS Mk2


Electrical Supply Voltage	230-240 V
Electrical Supply Frequency	50/60 Hz
Expected Motor Life	17000 Hours
Dry Time Range	15 – 20 Seconds
Rated Power	1.4 kW
Approx. Watt-Hours per Dry	7 Wh
Heater Element Power	1250 W
Operating Sound Level	72 dB at 1M
Motor Speed	7100 RPM
Air Speed	100 MPH
Operating Temperature Range	At ambient temp (20°C) - 55 °C
Motor Cut off Time	90 Seconds
Motor Class	Class E
Materials	Die-cast aluminium
Weight	4.6 kg
Finishes Available and Codes	Polished Chrome (DF06M2) White (DF06M2W)
IP Rating	IP23 (Protection from a large part of the body such as the hand, from solid objects greater than 50mm in diameter; Protection from sprayed water)
Cable Entry Point	Rear or bottom

Online information



Installation summary

- Mounting template provided to position the drill holes correctly
- The cover of the hand dryer is removed by loosening the 2 security screws at the bottom of the hand dryer using the supplied Allen key
 - Using an 8mm drill bit, drill the 4 holes required
 - Attach base unit to wall with 4 screws into the predrilled holes
 - Connect power supply from fuse spur to hand dryer terminal and connect all other electrical requirements – rear or bottom cable entry
 - Replace the cover and secure by tightening the 2 security screws at the bottom of the hand dryer using the supplied Allen key

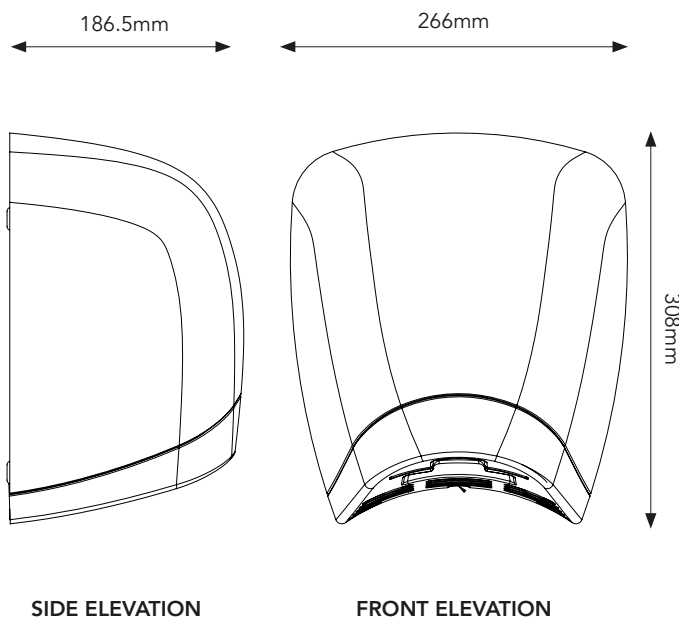

For more information

intelligenthanddryers.com

+44 (0) 114 354 0047

sales@ihdryers.co.uk

Intelligent Facility Solutions

Electric Works,

3 Concourse Way,

Sheffield

S1 2BJ