



INTELLIGENT FACILITY SOLUTIONS

Electric Works, 3 Concourse Way, Sheffield, S1 2BJ

United Kingdom: +44 (0) 114 354 0047

Eire: +353 190 36387

sales@ihdryers.co.uk

www.intelligenthanddryers.com

LIQUID SOAP DISPENSERS

SURFACE

Lever activated



IFSDJP0034
White finish



IFSDJP0034B
Black finish



IFSDJP0034C
Bright finish



IFSDJP0034CS
Satin finish

General Description

- Liquid soap dispenser of 1.5 L capacity, manufactured in stainless steel AISI 304, 0,8 mm thick, to be installed directly on the wall and lever-operated by means of an stainless steel lever.
- Available in four finishes (white, black, bright and satin) these soap dispenser models have a functional, robust and trendy design that matches the new range of bathroom accessories. This allows this soap dispenser to blend into any space perfectly.
- Suitable for high traffic facilities and for public use.
- Dispenses liquid soaps or hydro-alcoholic gel. Surgical soaps and soaps with solid abrasive particles are not supported.


Components & materials

- **DJP0034:** Stainless steel AISI 304, white epoxy finish.
- **DJP0034C:** Stainless steel AISI 304, bright finish.
- **DJP0034CS:** Stainless steel AISI 304, satin finish.
- **DJP0034B:** Stainless steel AISI 304, black epoxy finish.
- Level display in the front part that constantly indicates the level of soap available inside the soap dispenser.
- Inner plastic tank that prevents oxidation and that can be easily removed for cleaning and disinfection purposes.
- Lever made in stainless steel.
- Anti-drip corrosion resistant valve that dispenses 1.5 ml of soap per service. This anti-drip valve, which dispenses liquid soap, is easily interchangeable with the valves of the other soap dispensers of the same line.
- Hinged cover for operator convenience and speed of service.
- Opening on top with provided key that allows soap refill.
- It is mounted on the wall by means of four Ø4 stainless steel screws (provided) with their corresponding Ø 6mm plastic plugs (also provided).
- It is recommended to use liquid soaps or disinfectant gel soaps (maximum of alcohol content of 85 %) with a density between 0.9 and 1.35 kg/dm³ and a maximum viscosity of 3,000 cps.

Technical Specifications

Dimensions	250 x 110 x 175 mm
Capacity	1.,500 ml
Body, cover & base plate thickness	0.8 mm
Inner Tank Thickness	2.5 mm
Net weight	1.25 Kg
Quantity dispensed per pump	1.5 ml

Dimensions

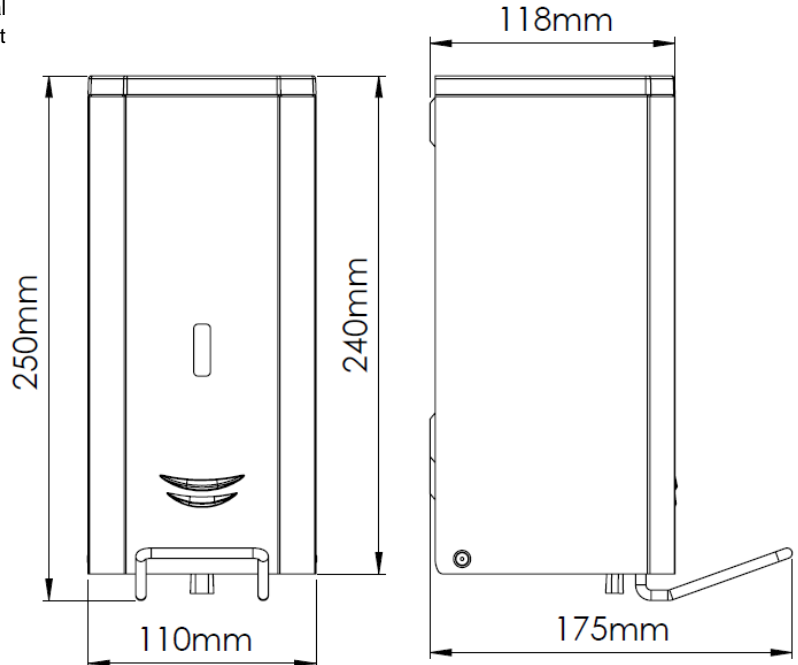

Dimensions ± 4%

OPERATION

Place one hand just under the soap dispenser valve and press the lever until the end of the soap dosage.

MOUNTING TEMPLATE

10-15 cm from shelf.

Revision 05-16